

# Dahua Access Control Temperature Measurement

Face recognition/Temperature measurement/Integration



Temperature measuring  
distance: 0.3m-0.7m



Temperature accuracy:  
 $\pm 0.5^{\circ}\text{C}$





Temperature  
abnormal alarm



Large capacity:  
100,000

## Key Features

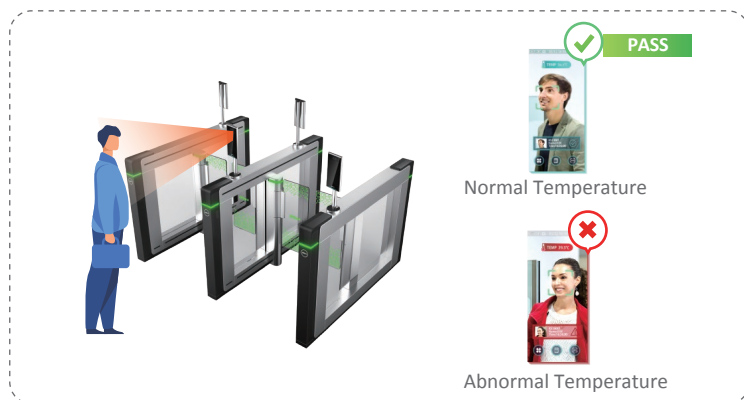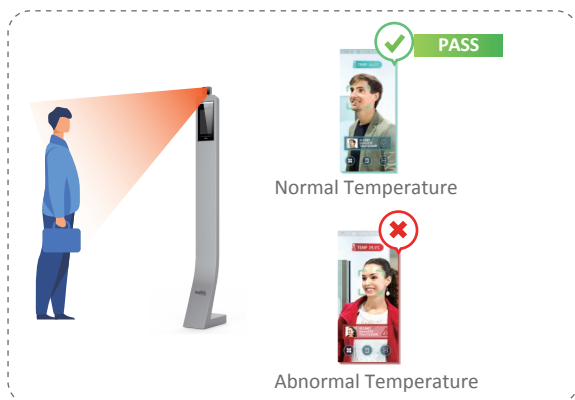

- Face recognition body temperature measurement integration, no need for human guard.
- Automatic checking of personnel information and body temperature, no contact to reduce infection.
- Face temperature automatic storage, easy to query.
- Fast access to prevent congestion.


## Application Scenario



Commercial Building



Apartment



School



Factory

## Products



DHI-ASI7213X-T/  
DSS-Express

- Temperature accuracy:  $\pm 0.5^{\circ}\text{C}$
- Temperature measurement distance: 0.3m ~ 0.7m
- Sound prompt: Temperature abnormal alarm



DHI-ASI7223X-A-T/  
DHI-ASGB8xxX/DSS-Express

- Temperature accuracy:  $\pm 0.5^{\circ}\text{C}$
- Temperature measurement distance: 0.3m ~ 0.7m
- Sound prompt: Temperature abnormal alarm



DHI-ASI7213X-T/  
DHI-ASF172X-T/DSS-Express

- Temperature accuracy:  $\pm 0.5^{\circ}\text{C}$
- Temperature measurement distance: 0.3m ~ 0.7m
- Sound prompt: Temperature abnormal alarm

\* Design and specifications are subject to change without notice.

Ver.1, Apr. 2020

## DAHUA TECHNOLOGY

No.1199 Bin'an Road, Binjiang District, Hangzhou, China. 310053

Tel: +86-571-87688883 Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

